


RIPDEXG

G5A LINE

HANDLING OF BARBED WIRES

- Handling of sharped barbed wires
- Sheet metal works
- Glass works

Products in stock still have EN388 labelling according to directive 89/686/EEC : 4544

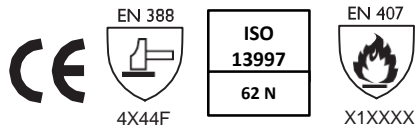

ISO 13997	A	B	C	D	E	F
Cutting load in Newtons	≥ 2	≥ 5	≥ 10	≥ 15	≥ 22	≥ 30

Approval in progress – indicative levels

STANDARDS (DETAILS ON WEB SITE)
www.rostaing.com/normes-securite

SIZES

- 6 7 8 9 10 11 12

COMPOSITION

Glove Oil-proofed & water-proofed cow split leather
Knitting TEKINOX® weave
Total length 35 cm

CARE



PACKAGING

Bag of 5 pairs – Box of 20 pairs

PRO•LINE :
Our selection



Optimum cut protection
Technological weave

TEKINOX®
ROSTAING



Contact heat resistance

Thermal isolation :
100 °C for 15 seconds minimum

Oil-proofed and
water-proofed leather



Perforation resistance

Cow split leather



Vein patch



Forearm protection
Cuff
15 cm

