


# RIPDEXG

PERFORAZOR RANGE

## HANDLING OF BARBED WIRES

- Handling of sharped barbed wires, perimeter security
- Safety
- Metal and Glass works

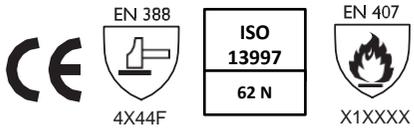

ISO 13997	A	B	C	D	E	F
Cutting load in Newtons	≥ 2	≥ 5	≥ 10	≥ 15	≥ 22	≥ 30

AET N°0075/011/162/10/19/3218 (CTC LYON)

STANDARDS (DETAILS ON WEB SITE)  
[www.rostaing.com/normes-securite](http://www.rostaing.com/normes-securite)

**SIZES**

- 6
- 7
- 8
- 9
- 10
- 11
- 12

**COMPOSITION**

**Glove** Oil resistant & water resistant cow split leather  
**Lining** Stainless steel, HPPE, polyamide knitted glove  
**Total length** 35 cm

**CARE**



**PACKAGING**

Bag of 5 pairs – Box of 20 pairs

  
**Maximum cut resistance**  
 Technological weave

  
**Forearm protection**  
 Cuff length 15 cm



**Contact heat resistance**

Thermal insulation :  
 100 °C for 15 seconds minimum

**Oil resistant and water resistant leather**



**Perforation resistance**

Cow split leather



**Vein patch**



RANGE  
**PERFORAZOR**